


DC power supply unregulated for 400VAC input voltage type PS2U500T-K

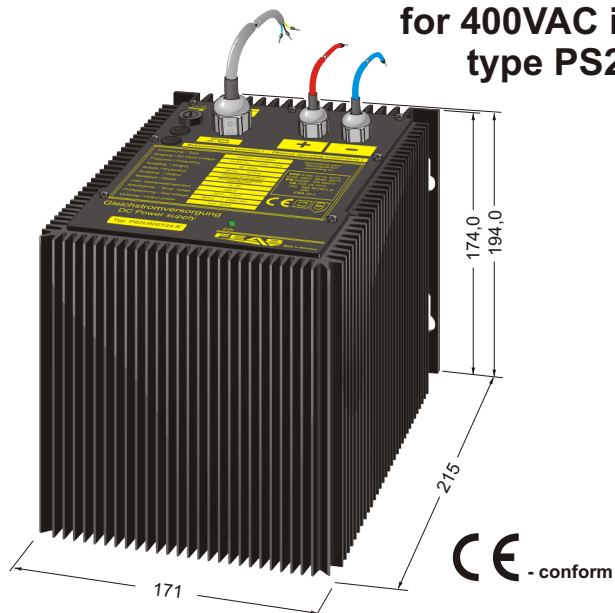

Technical data

Input data		
Input voltage AC	400VAC	45 - 66 Hz
Input voltage tolerance	-20% to +15%	
Input current at nominal load	at 400VAC max. 1,3A	
Protective circuit	-	
Hold-up time	20 mSek. typ.	

Output data	
Output voltage $U_{Nominal}$	see table below
Output current $I_{Nominal}$	see table below
Current limiting	-
Residual ripple (100Hz)	< 2%

Control data	
Control deviation load	-
Control deviation supply	-
Control time	-

Operating data	
Duty circle	100%
Operating temperature range	-30°C to +70°C
Derating	-
Storage temperature range	-30°C...+105°C
Cooling	selfcooling
	recommended respective distance 15mm each

Safety devices	
Fuse for input	5,0A delayed, integrated into the device
Fuse for output	in dependency of nominal output current
Overload protection	-
MTBF	>400.000 h


Safety data	
Test voltage transformer	5 kVac in accordance to VDE 0551
High voltage resistance	Primary circuit - secondary circuit 3,75 kVac acc. to VDE 0806 / IEC 380
Degree of EMI suppresion	< K acc. to VDE 0875 and VDE 0877
Protection class	Class 1 with PE-Connection (EN 60950)
Extra low safety potential	PELV (EN60204), SELV (EN 60950)
Ambient humidity	95% relative humidity, yearly average dewing allowed for use in tropical ambient
Protective class enclosure	IP 65
Protective class terminals	-
Vibration proof	>30g at 33Hz in X,Y and Z, acc. to IEC 60068-2-27

Applied construction regulations	
according to VDE	VDE 0100, 0110, 0113, 0551, 0160/W2, 0806
IEC	IEC 60950, IEC61000-6-1-2, IEC60068-2-3
	IEC 60068-2-11-52, IEC 60529, IEC 380
EN	EN60950, EN50082-1
	EN61000-6-1-2, EN50178,
	EN50204, EN61558-2-17
	EN60204, EN60529, EN61000-4-2-3-4-5-6-8-11
	EN60068-1, EN60068-2-1-2-3-6-27-30
	EN45501, EN50021
CSA / UL	CSA-C 22.2 / UL60950, UL508, UL1950

Mechanics	
Mounting	wall mounting with screws

- Output separated according to VDE 0551
- Extra low safety potential PELV (EN 60204), SELV (EN 60950), **except PS2U500T130-K**
- Parallel connection possible
- Suitable for the tropics - Epoxy resin casted
- Operating status shown by LED
- Safety acc. to VDE, EN, UL, CSA

Load current diagram
at nominal input voltage

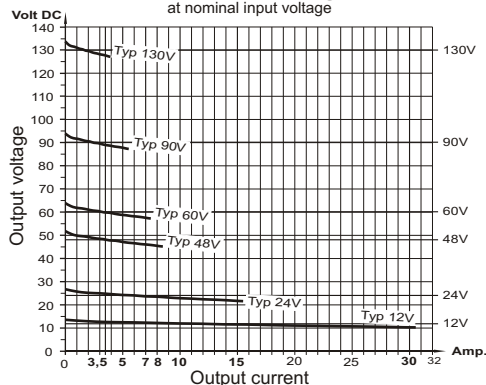

Nominal output voltage	12,0V _{DC}	24,0V _{DC}	48,0V _{DC}	60,0V _{DC}	90,0V _{DC}	130,0V _{DC}	
Range of adjustment output voltage	-	-	-	-	-	-	
Type	PS2U 500T12-K	PS2U 500T24-K	PS2U 500T48-K	PS2U 500T60-K	PS2U 500T90-K	PS2U 500T130-K	
Nominal output current	30,0Amp.	15,0Amp.	8,0Amp.	7,0Amp.	5,0Amp.	3,5Amp.	
Power	360Watt	360Watt	384Watt	420Watt	450Watt	455Watt	
Efficiency	90%	90%	90%	90%	90%	90%	
Dimensions (W x H x D)	171x194x215	171x194x215	171x194x215	171x194x215	171x194x215	171x194x215	
Weight	approx. 11,82kg	approx. 11,82kg	approx. 11,82kg	approx. 11,82kg	approx. 11,82kg	approx. 11,82kg	
Order-No.	583213	583225	583249	583261	583291	5832131	