


Radio interference suppression filter 4-Lines 2-Stages Type NFK4135-30A42-H

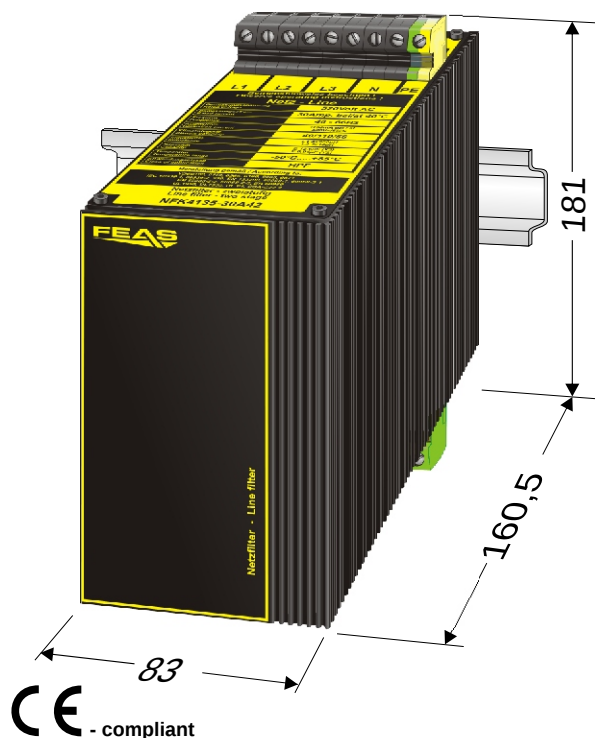

- ☐ High insertion loss over a broad frequency range
- ☐ Small enclosure design
- ☐ Using aluminium enclosure in order to improve the heat conduction
- ☐ Suitable for the tropics - Epoxy resin casted
- ☐ Safety acc. to VDE, EN, UL and CSA

Type	NFK4135-30A42
Order number	51102
Rated voltage	520 V _{AC}
Frequency	40 - 66 Hz
Rated current	4 x 30,0 A
Inductance	L1 4x900µH L2 4x10µH
Capacity	3 x 2,2µF(X2) 6 x 1,0µF(X2) 2 x 0,47µF(Y2)
Dimensions (W x H x D)	83x181x160,5
Weight	approx. 4,20 kg

Technical data

Input data	
Rated voltage U _n	see table below
Frequency	see table below
Rated current I _n	see table below
Overload current	1,5 x I _n t < 2 minutes 3 x / hours
Inductance L _n	see table below
Capacity C _n	see table below
Derivation current	< 3,5mA at 400V~, 50Hz
Discharge resistor	3 x approx. 1MW
Operating data	
Duty circle	100%
Operating temperature range	-50°C to +85°C
Derating	-
Storage temperature range	-50°C to +105°C
Cooling	selfcooling recommended respective distance 15 mm each
Safety devices	
Input fuse	-
Output fuse	-
Overload protection	-
MTBF	>380.000 h
Safety data	
Test voltage	2,5kV- (Conductor - PE)
Protection class	class 1, with PE connection (EN 60950)
Ambient humidity	95% relative humidity, yearly average dewing allowed for use in tropical atmosphere
Protection class enclosure	IP 65
Protection class terminals	IP 20 (BGV A3)
Vibration proof	>30g at 33Hz in X,Y and Z, acc. to IEC 60068-2-27
Applied design specifications	
according to VDE	VDE 0100,0110,0113,0140-1,0551,0160/W2,0806
IEC	IEC 60939-1,IEC60939-2,IEC60068-2-3, IEC 60068-2-11-52,IEC 60529,IEC 380
EN	EN133200,EN60068-1,EN 60950, EN61000-6-1-2-3-4,EN50178, EN55011,EN50204,EN61558-2-17, EN60204,EN60529,EN61000-4-2-3-4-5-6-8-11, EN60068-1, EN60068-2-1-2-3-6-27-30, EN45501,EN50021
CSA / UL	CSA-C 22.2 / UL1283, UL94V1
Mechanical data	
Mounting	On rails acc. to DIN 46277

Insertion loss at 50 W

