


Radio interference suppression filters

2-Lines 2-Stages

Type NFK772-8A22

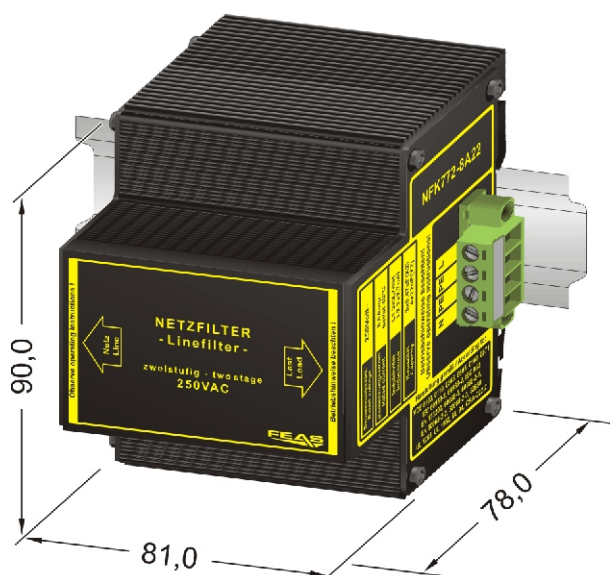

CE - conform

- ☐ High insertion loss over a broad frequency range
- ☐ Optimised against asymmetric interferences
- ☐ 2-Stage design in order to improve the filtereffect
- ☐ Enclosure optimised for using in distribution-panels
- ☐ Suitable for the tropics - Epoxy resin casted
- ☐ Safety acc. to VDE, EN, UL, CSA

Technical Data

Electrical data

Rated voltage U_R	see table below
Frequency	see table below
Rated current I_R	see table below
Overload current	$1,5 \times I_R$ $t < 2 \text{ Min. } 3 \times / \text{h}$
Inductance L_R	see table below
Capacity C_R	see table below
Derivation current	$< 0,75 \text{ mA}$ at 230 V ~, 50Hz
Discharge resistor	ca. 1 M

Operating data

Duty circle	100%
Operating temperature range	-50°C to $+85^\circ \text{C}$
Derating	-
Storage temperature range	-60°C ... $+105^\circ \text{C}$
Cooling	self cooling
	recommended respective distance 15mm each

Safety devices

Fuse for input	-
Fuse for output	-
Overload protection	-
MTBF	$> 380.000 \text{ h}$

Safety data

Test voltage	2,5kV- (Conductor - PE)
Protection class	Class 1 with PE-Connection (EN 60950)
Extra low safety potential	-
Ambient humidity	95% relative humidity, yearly average dewing allowed for use in tropical ambient
Protective class enclosure	IP 65
Protective class terminals	IP 20 (VGB4)
Vibration proof	$> 30 \text{ g}$ at 33Hz in X,Y and Z, acc. to IEC 60068-2-27

Applied construction regulations

according to VDE	VDE 0100, 0110, 0113, 0551, 0160/W2, 0806
IEC	IEC 60939-1, IEC60939-2, IEC60068-2-3 IEC 60068-2-11-52, IEC 60529, IEC 380
EN	EN133200, EN60068-1 EN61000-6-1-2-3-4, EN50178 EN55011, EN50204, EN61558-2-17 EN60204, EN60529, EN61000-4-2-3-4-5-6-8-11 EN60068-1, EN60068-2-1-2-3-6-27-30 EN45501, EN50021
CSA / UL	CSA-C 22.2 / UL1283, UL94V1

Mechanics

Mounting	On rails acc. to DIN 46277 or wallmounting with screws
----------	--

Type	NFK772-8A22
Rated voltage	250VAC
Frequency	44 - 66Hz
Rated current	8,0Amp. at 40°C
Inductance	L1 2x2,7mH L2 2x2,7mH
Capacity	3 x 0,47 μF (X2) 4 x 22nF(Y2)
Dimensions (W x H x D)	96x90x78
Wheight	approx. 1,00kg
Order-No.	51093

