
## product specification DC power supply unregulated: PSLC153

input: 115 / 230Vac - output: 15Vdc / 4.5Amp.

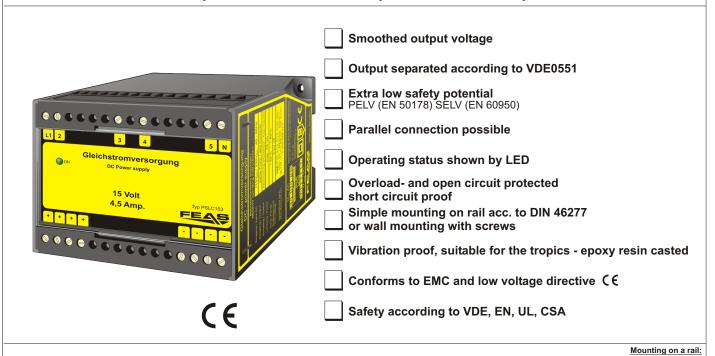

## Application

The power supplies of the PSLC3 series are powerful and robust devices L1 to power electrical loads, like contactors, magnetic switches, magnetic valves, relays or something like that. Power supplies of this type are suitable as well for the most PLC-applications.

By using only few components the uncomplex circuit arrangement guarantees the advantage of a long life span and a high degree of efficiency (>80%).


This power supply is optimally suited for loads requiring high starting current. The output voltage is short circuit proof.


Because of its robust design, casted in a stable plastics housing, it is particularly suitable for being used in rough industrial environment, e.g. in shipbuilding. Furthermore it is quite insensitive to surge voltages.


## **Functional principle**

In the unregulated power supply PSLC3 AC voltage is transfered through a 50-Hz transformer. Afterwards the voltage is rectified by a bridge rectifier and the resulting pulsing DC voltage is smoothed with capacitors.

Because this type of power supply has no output voltage stabilization, the output voltage will also float accordingly to the transformation rate, depending on line-voltage fluctuations and consumer load.







Please read the data sheets and

the user manual for further information



Completly embedded with resin in a plastics housing for mounting on rail or wall mounting with screws.



Postfach 1521 D - 22905 AHRENSBURG telefax: +49 4102 40930

phone: +49 4102 42082 e-mail: info@feas.com internet: www.feas.com

line voltage 115 V 230 V consumer

suitable for rail acc. to DIN 46277

