
## Product specification DC power supply unregulated: PSU3012

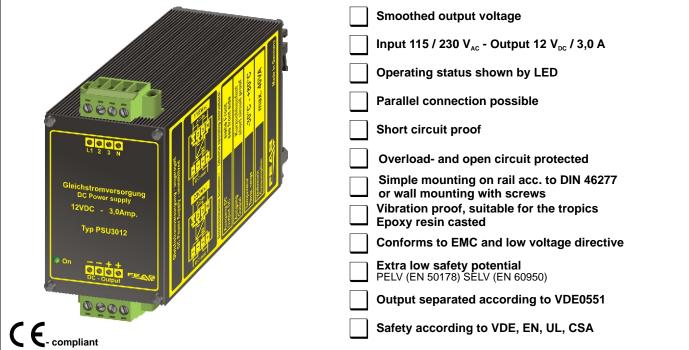

## Application

The power supplies of the PSU30 series are powerful and robust devices to power electrical loads, like contactors, magnetic switches, magnetic valves, relays or similar. Power supplies of this type are suitable as well for the most PLC-applications.


The uncomplex circuit arrangement guarantees the advantage of a long life span and a high degree of efficiency(>90%).


This power supply is optimally suited for loads requiring high starting current.


Because of its robust design, it is particularly suitable for being used in rough industrial environment. Furthermore it is quite insensitive to surge voltages.

## **Functional principle**

In the unregulated power supply PSLC2 AC voltage is transfered through a 50-Hz transformer. Afterwards the voltage is rectified by a bridge rectifier and the resulting pulsing DC voltage is smoothed with capacitors. Because this type of power supply has no output voltage stabilization, the output voltage will also float accordingly to the transformation rate, depending on line-voltage fluctuations and consumer load.







## Design

Completly embedded with resin in a aluminum housing for mounting on rail or wall mounting with screws.



P.O. Box 1521 D - 22905 Ahrensburg Phone: +49 4102 42082 Fax: +49 4102 40930 E-mail : info@feas.com Internet: www.feas.com

