
Product specification Switch mode power supply SNT4624

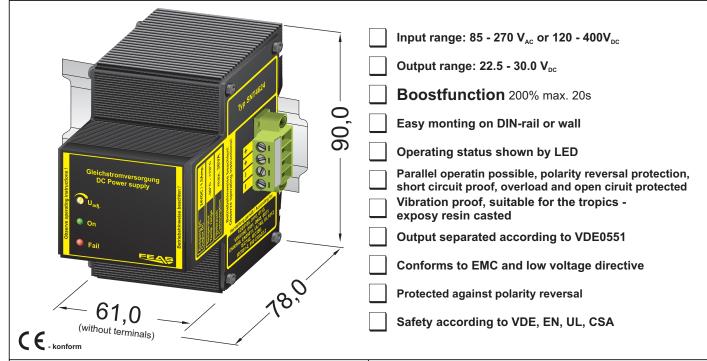

Application

The power supplies of the series SNT46 are powerful and robust power supplies to power sensitive loads in rugged industrial environments.

Because of their design, they are particularly suitable for use in control cabinets. The functional and stable housing combines modern design with good radio interference and high reliability for long-term use.

The short circuit protected DC output voltage of this design is adjustable from 22.5 to 30.0 V. The output current can rise in the short term to over 200% of the nominal value, so the power supplies very well suited for loads with high inrush current.

Functional principle

In the power supply SNT4624 a flyback converter operates to transform the energy in two steps. During the conducting phase the diode is blocking, the inductor is energized and a magnetic field establishes.

There is no electrical transmission; the consumer load is supplied with energy from the capacitor. When the switching transistor opens, the blocking phase begins. The current in the inductor cannot change immediately, discharges through the diode and a negative voltage establishes at the inductor.

Now operating like a power source the inductor reloads the capacitor and supplies the consumer with energy. The energy flows from the inductor into the capacitor and the consumer and through the conducting diode back to the inductor.

Design

Completly embedded with resin in an aluminium housing for mounting on a rail.



Postfach 1521 D - 22905 Ahrensburg Phone: +49 4102 42082 Telefax: +49 4102 40930

nput

E-Mail : sales@feas.com Internet: www.feas.com

Consumer

DC-Outpu

