


DC power supply unregulated for 3 x 500VAC input voltage type PS5U1K2

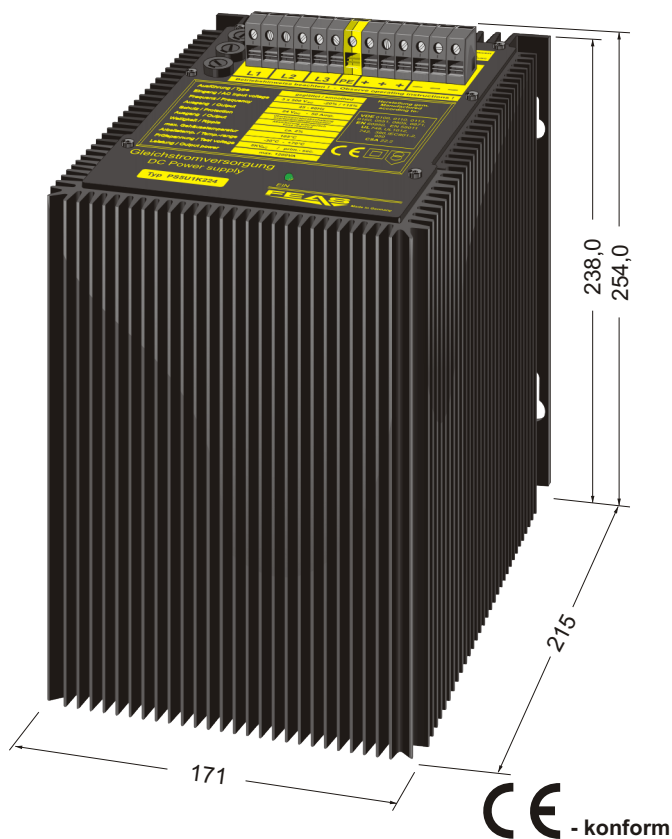

- Output separated according to VDE 0551
- Extra low safety potential PELV (EN 60204), SELV (EN 60950)
- Parallel connection possible
- Suitable for the tropics - Epoxy resin casted
- Operating status shown by LED
- Safety acc. to VDE, EN, UL, CSA

Technical data

Input data		
Input voltage AC	3 x 500VAC	45 - 66 Hz
Input voltage tolerance	-20% to +15%	
Input current each phase at nominal load	at 3 x 500VAC max. 1,6A each phase	
Protective circuit	-	
Hold-up time	20 mSek. typ.	

Output data	
Output voltage $U_{Nominal}$	see table below
Output current $I_{Nominal}$	see table below
Current limiting	-
Residual ripple (100Hz)	< 2%

Control data	
Control deviation load	-
Control deviation supply	-
Control time	-

Operating data	
Duty circle	100%
Operating temperature range	-30°C to +70°C
Derating	-
Storage temperature range	-30°C...+105°C
Cooling	selfcooling
	recommended respective distance 15mm each

Safety devices	
Fuse for input	10,0A delayed each phase, integrated into the device
Fuse for output	in dependency of nominal output current
Overload protection	-
MTBF	>400.000 h

Safety data	
Test voltage transformer	5 kVac in accordance to VDE 0551
High voltage resistance	Primary circuit - secondary circuit 3,75 kVac acc. to VDE 0806 / IEC 380
Degree of EMI suppresion	< K acc. to VDE 0875 and VDE 0877
Protection class	Class 1 with PE-Connection (EN 60950)
Extra low safety potential	PELV (EN60204), SELV (EN 60950)
Ambient humidity	95% relative humidity, yearly average dewing allowed for use in tropical ambient
Protective class enclosure	IP 65
Protective class terminals	IP 20 (VGB4)
Vibration proof	>30g at 33Hz in X,Y and Z, acc. to IEC 60068-2-27

Applied construction regulations	
according to VDE	VDE 0100, 0110, 0113, 0551, 0160/W2, 0806
IEC	IEC 60950, IEC61000-6-1-2, IEC60068-2-3 IEC 60068-2-11-52, IEC 60529, IEC 380
EN	EN60950, EN50082-1 EN61000-6-1-2, EN50178, EN50204, EN61558-2-17 EN60204, EN60529, EN61000-4-2-3-4-5-6-8-11 EN60068-1, EN60068-2-1-2-3-6-27-30 EN45501, EN50021
CSA / UL	CSA-C 22.2 / UL60950, UL508, UL1950

Mechanics	
Mounting	wall mounting with screws

Nominal output voltage		24,0V _{DC}		48,0V _{DC}
Range of adjustment output voltage		-		-
Type		PS5U 1K224		PS5U 1K248
Nominal output current		50,0Amp.		25,0Amp.
Power		1200Watt		1200Watt
Efficiency		90%		90%
Dimensions (W x H x D)		171x254x215		171x254x215
Weight		approx. 19,35kg		approx. 19,35kg
Order-No.		582726		582750

