



# Data sheet


## Power Supply with Accupack (DC-UPS):LDR8224-HT

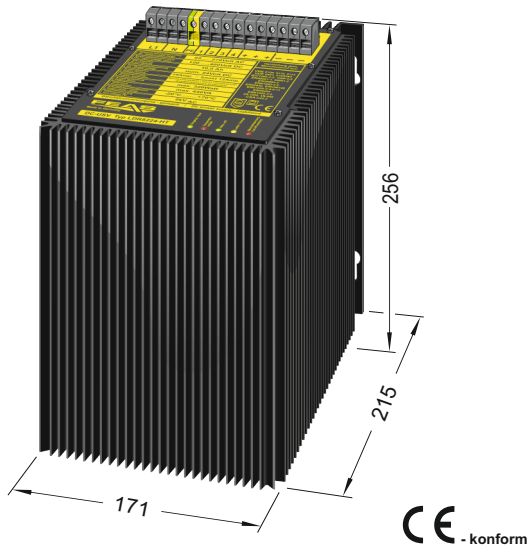

Discharge current diagram at 20°C

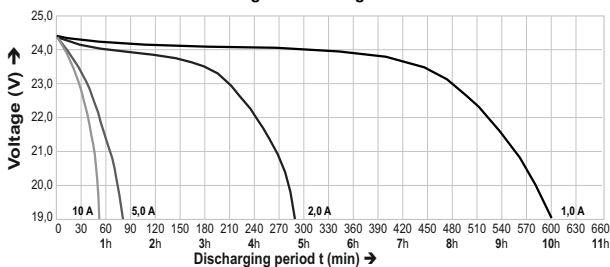

Withdrawable capacity in % of the nominal capacity at different temperatures

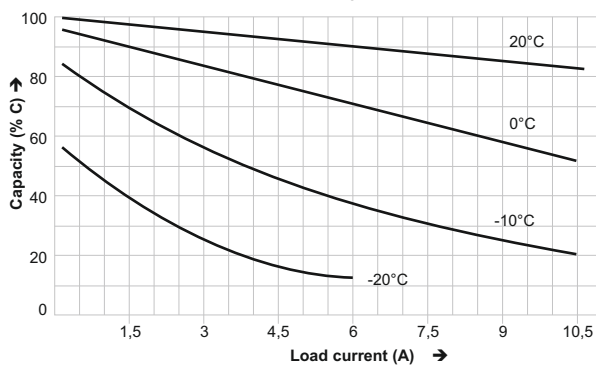

### Products of the series:

Type	LDR8212-HT	LDR8224-HT
Order number	589947	589946
Output voltage	9.0 - 14.0 V <sub>DC</sub>	19.0 - 28.0 V <sub>DC</sub>
Output current	15 A	10 A
Capacity (20°)	20 Ah	10 Ah
Nominal Power	210 W	280 W
Buffered time	90min typ. 15 A	50min typ. 10 A

### Technical data

General data	
Type	LDR8224-HT
FEAS Order number	589946
Product description	Power Supply with accupack
Product function	DC power supply
Input data	
AC input voltage	85 - 270V <sub>AC</sub> (0-66Hz)
DC input voltage	120 - 400V <sub>DC</sub>
Input current at nominal load	at 115V <sub>AC</sub> max. 3.0A / at 230V <sub>AC</sub> max. 1.5A
Input current peak	< 8 A at 230V <sub>AC</sub>
Protective circuit	Transient voltage suppressor Varistor
Output data	
Output voltage U <sub>Nominal</sub>	24 V <sub>DC</sub>
Buffered voltage	19.0 - 28.0 V <sub>DC</sub> following the accu-voltage
Output current I <sub>Nominal</sub>	10.0A
Current limiting/	appr. 30.0 A
Power	280 Watt
Residual ripple (20MHz Bandwidth)	<25mV <sub>pp</sub>
Control data	
Control deviation (Load)	<200 mV with load variation 10 ..... 90%
Control deviation (Supply)	<25 mV with load variation ±10%
Control time	<10ms with load variation 10 ..... 90%
Operating data	
Duty circle	100%
Efficiency	approx. 91% (grid mode)
Capacity C	10.0 Ah (20°C)
Buffered Time	typ. 10A - 50min (see graph on the left)
Parallel connection	No
Operating temperature range	-20°C to +70°C
Storage temperature range	-30°C to +75°C
Derating	from 40°C
Cooling	selfcooling recommended respective distance 15mm each
Installation altitude	unlimited
MTBF	> 380.000h (without accupack)
Safety devices	
Fuse for input	at 115V <sub>AC</sub> 5.0A slow blow / at 230V <sub>AC</sub> 2.5A slow blow
Fuse for output	not necessary - short circuit proof
Overload protection	integrated into device
Safety data	
Test voltage transformer	5kV <sub>AC</sub> according to VDE0570
High voltage resistance	Input/Output 4,4kV <sub>AC</sub> according to VDE0806/IEC380
Degree of EMI suppresion	according to VDE0871B, EN55022/B
Protection class	Protection class I with PE-Connection (EN60950)
Extra low safety potential	PELV (EN60204), SELV (EN60950)
Ambient humidity	95% relative humidity, yearly average dewing allowed for use in tropical ambient
Protective class enclosure	IP54
Protective class terminals	IP20 (BGV A3)
Vibration proof	>30g at 33Hz in X, Y and Z acc. IEC68 and DIN41640
Status & Signal	
Status indicator	LED - Grid, Charging, Buffer mode, Temperature
Signals	Relais - Grid/Temp., Accu-protection
Interfaces	Sleep-mode
Applied construction regulations	
according to VDE	VDE0100, VDE0110, VDE0113, VDE0551, VDE0806
IEC	IEC60950-1, IEC61000-6-1-2-3-4, IEC60068-2-3, IEC60068-2-11-52, IEC60529
EN	EN60950-1, EN61140, EN61000-6-1, EN61000-6-2, EN61000-6-3, EN61000-6-4, EN55022, EN55011, EN61000-3-2, EN61000-3-3, EN60204, EN60529, EN61000-4-2-3-4-5-6-8-11, EN60068-1, EN60668-2-1, EN61558-2-17, EN61010-1
CSA/UL	CSA-C 22.2 / UL60950, UL508, UL1950
Mechanical data	
Mounting	on wall
Dimensions (W x H x D)	171mm x 256mm x 215mm
Weight	approx. 16.50kg



Postfach 1521  
D - 22905 Ahrensburg

Phone: +49 4102 42082  
Fax: +49 4102 40930

E-Mail: sales@feas.com  
Internet: www.feas.com