


Radio interference suppression filter 4-Lines 2-Stages Type NFK885-8A42

Technical data

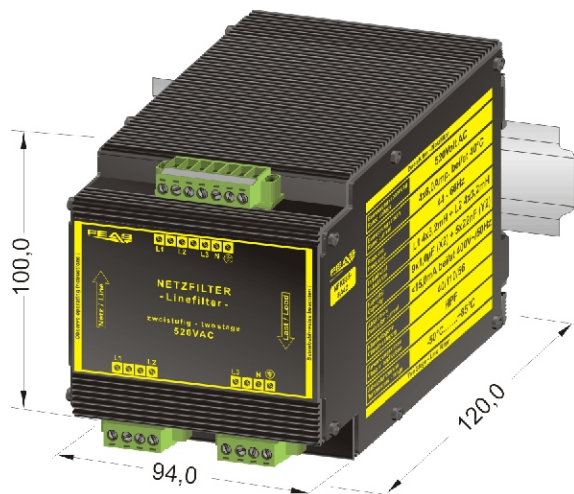

CE - compliant

- High insertion loss over a broad frequency range
- Optimised against asymmetric interferences
- Using aluminium enclosure in order to improve the heat conduction
- Suitable for the tropics - Epoxy resin casted
- Safety acc. to VDE, EN, UL and CSA

Type	NFK885-8A42
Order number	51099
Rated voltage	520 V _{AC}
Frequency	44 - 66 Hz
Rated current	4 x 8,0 A
Inductance	L1 4x3,2mH L2 4x3,2mH
Capacity	9 x 1,0µF(X2) 5 x 22nF(Y2)
Dimensions (W x H x D)	94x100x120
Weight	approx. 2,35 kg

Input data	
Rated voltage U _n	see table below
Frequency	see table below
Rated current I _n	see table below
Overload current	1,5 x I _n t < 2 minutes 3 x / hours
Inductance L _n	see table below
Capacity C _n	see table below
Derivation current	< 15,0mA at 400V-, 50Hz
Discharge resistor	3 x approx. 1M

Operating data	
Duty circle	100%
Operating temperature range	-50°C to +85°C
Derating	-
Storage temperature range	-50°C to +105°C
Cooling	selfcooling recommended respective distance 15 mm each

Safety devices	
Input fuse	-
Output fuse	-
Overload protection	-
MTBF	>380.000 h


Safety data	
Test voltage	2,5kV- (Conductor - PE)
Protection class	class 1, with PE connection (EN 60950)
Ambient humidity	95% relative humidity, yearly average dewing allowed for use in tropical atmosphere
Protection class enclosure	IP 65
Protection class terminals	IP 20 (BGV A3)
Vibration proof	>30g at 33Hz in X,Y and Z, acc. to IEC 60068-2-27

Applied design specifications	
according to VDE	VDE 0100,0110,0113,0140-1,0551,0160/W2,0806
IEC	IEC 60939-1,IEC60939-2,IEC60068-2-3, IEC 60068-2-11-52,IEC 60529,IEC 380
EN	EN133200,EN60068-1,EN 60950, EN61000-6-1-2-3-4,EN50178, EN55011,EN50204,EN61558-2-17, EN60204,EN60529, EN61000-4-2-3-4-5-6-8-11, EN60068-1, EN60068-2-1-2-3-6-27-30, EN45501,EN50021
CSA / UL	CSA-C 22.2 / UL1283, UL94V1

Mechanical data	
Mounting	On rails acc. to DIN 46277 or wallmounting with screws

Insertion loss at 50

asymmetric ——— unsymmetric - - - - -
symmetric - - - - -

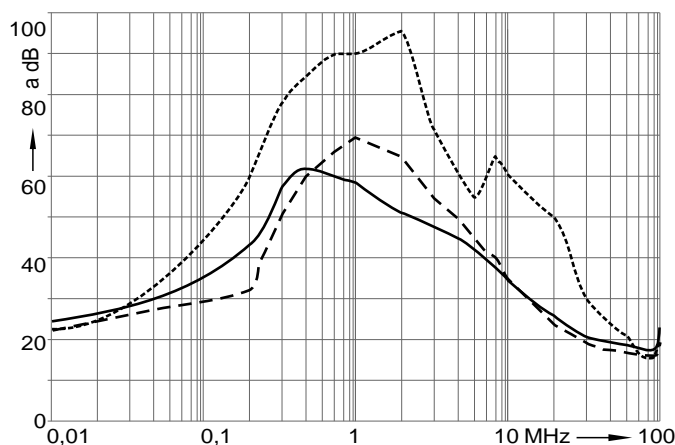

FEAS

P.O. Box 1521
D - 22905 Ahrensburg

Phone: +49 4102 42082
Fax: +49 4102 40930

E-mail : contact@feas.com
Internet: www.feas.com