



# DC power supply unregulated for 115VAC input voltage type PSU750-K

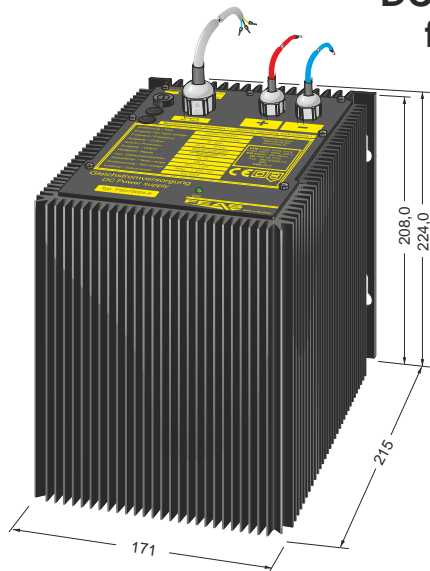

- Output separated according to VDE 0551
- Extra low safety potential PELV (EN 60204), SELV (EN 60950), **except PSU750130-K**
- Parallel connection possible
- Suitable for the tropics - Epoxy resin casted
- Operating status shown by LED
- Safety acc. to VDE, EN, UL, CSA
- Normal cable length approx. 1,0m longer cables possible

### Load current diagram

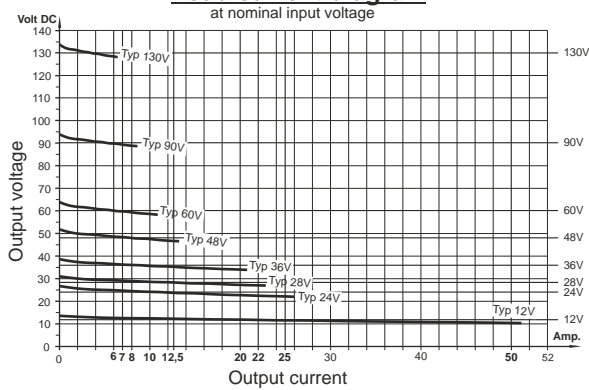

## Technical data

Input data		
Input voltage AC	115VAC	45 - 66 Hz
Input voltage tolerance	-20% to +15%	
Input current at nominal load	at 115VAC max. 7,6A	
Protective circuit	-	
Hold-up time	20 mSek. typ.	

Output data	
Output voltage $U_{Nominal}$	see table below
Output current $I_{Nominal}$	see table below
Current limiting	-
Residual ripple (100Hz)	< 2%

Control data	
Control deviation load	-
Control deviation supply	-
Control time	-

Operating data	
Duty circle	100%
Operating temperature range	-30°C to +70°C
Derating	-
Storage temperature range	-30°C...+105°C
Cooling	selfcooling recommended respective distance 15mm each

Safety devices	
Fuse for input	20,0A delayed, integrated into the device
Fuse for output	in dependency of nominal output current
Overload protection	-
MTBF	>400.000 h

Safety data	
Test voltage transformer	5 kVac in accordance to VDE 0551
High voltage resistance	Primary circuit - secondary circuit 3,75 kVac acc. to VDE 0806 / IEC 380
Degree of EMI suppresion	< K acc. to VDE 0875 and VDE 0877
Protection class	Class 1 with PE-Connection (EN 60950)
Extra low safety potential	PELV (EN60204), SELV (EN 60950)
Ambient humidity	95% relative humidity, yearly average dewing allowed for use in tropical ambient
Protective class enclosure	IP 65
Protective class terminals	-
Vibration proof	>30g at 33Hz in X,Y and Z, acc. to IEC 60068-2-27

Applied construction regulations	
according to VDE	VDE 0100, 0110, 0113, 0551, 0160/W2, 0806
IEC	IEC 60950, IEC61000-6-1-2, IEC60068-2-3 IEC 60068-2-11-52, IEC 60529, IEC 380
EN	EN60950, EN50082-1 EN61000-6-1-2, EN50178, EN50204, EN61558-2-17 EN60204, EN60529, EN61000-4-2-3-4-5-6-8-11 EN60068-1, EN60068-2-1-2-3-6-27-30 EN45501, EN50021
CSA / UL	CSA-C 22.2 / UL60950, UL508, UL1950

Mechanics	
Mounting	wall mounting with screws

Nominal output voltage	12,0V <sub>DC</sub>	24,0V <sub>DC</sub>	28,0V <sub>DC</sub>	36,0V <sub>DC</sub>	48,0V <sub>DC</sub>	60,0V <sub>DC</sub>	90,0V <sub>DC</sub>	110,0V <sub>DC</sub>	130,0V <sub>DC</sub>
Input voltage	115VAC	115VAC	115VAC	115VAC	115VAC	115VAC	115VAC	115VAC	115VAC
Type	PSU 75012-K	PSU 75024-K	PSU 75028-K	PSU 75036-K	PSU 75048-K	PSU 75060-K	PSU 75090-K	PSU 750110-K	PSU 750130-K
Nominal output current	50,0Amp.	25,0Amp.	22,0Amp.	20,0Amp.	12,5Amp.	10,0Amp.	8,0Amp.	7,0Amp.	6,0Amp.
Power	600Watt	600Watt	616Watt	720Watt	600Watt	600Watt	720Watt	770Watt	780Watt
Efficiency	90%	90%	90%	90%	90%	90%	90%	90%	90%
Dimensions (W x H x D)	171x224x215	171x224x215	171x224x215	171x224x215	171x224x215	171x224x215	171x224x215	171x224x215	171x224x215
Weight	approx. 17,25kg	approx. 17,25kg	approx. 17,25kg	approx. 17,25kg	approx. 17,25kg	approx. 17,25kg	approx. 17,25kg	approx. 17,25kg	approx. 17,25kg
Order-No.	584012	584024	584028	584036	584048	584060	584090	5833111	5840130