
product specification switch-mode power supply: GSNT9012

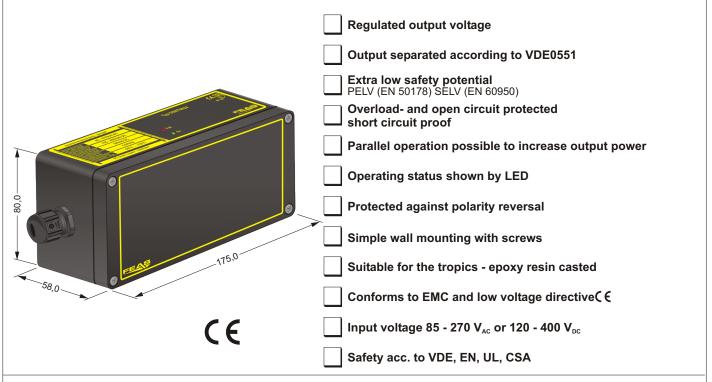

Application

The switch-mode power supplies of the GSNT90 series are powerful and robust devices to power sensitive loads in a hard industrial environment.

These features result from the modern construction with a good radio shielding and high reliability integrated in a functional and stable casing.

The short circuit proof output DC voltage of this model can be adjusted from 11.5 to 16.0 V.

This power supply is optimally suited for loads requiring high starting currents.

Functional principle

In the power supply GSNT9012 a flyback converter operates to transform the energy in two steps.

During the conducting phase the diode is blocking, the inductor is energized and a magnetic field establishes. There is no electrical transmission; the consumer load is supplied with energy from the capacitor.

When the switching transistor opens, the blocking phase begins. The current in the inductor cannot change immediately, discharges through the diode and a negative voltage establishes at the inductor.

Now operating like a power source the inductor reloads the capacitor and supplies the consumer with energy.

The energy flows from the inductor into the capacitor and the consumer and through the conducting diode back to the inductor.


AC-input AC-input Consumer The adjustment of the output voltage DC-output ACCU ACCU

optional accumulator in parallel operation

or.

Design

Completly embedded with resin in a metal housing for wall mounting with screws.



Postfach 1521 phone: +49 4102 42082 D - 22905 AHRENSBURG telefax: +49 4102 40930

phone: +49 4102 42082 e-mail: info@feas.com telefax: +49 4102 40930 internet: www.feas.com