


# Radio interference suppression filters

## 2-Lines 2-Stages

### Type NFK772-4S22

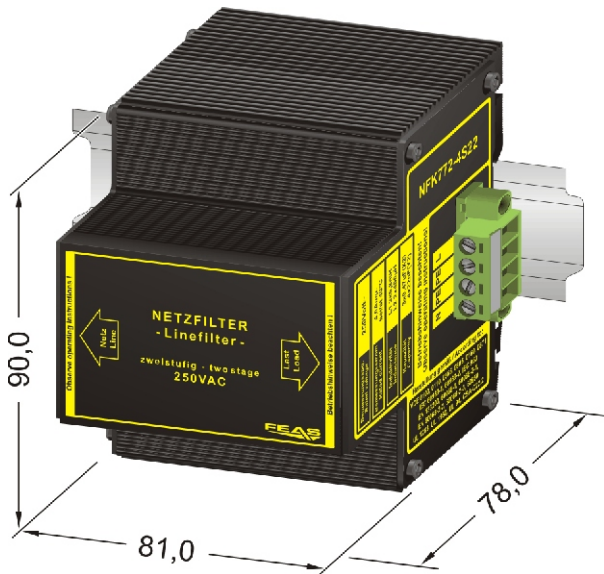

- High insertion loss over a broad frequency range
- Optimised against interferences in the lower frequency response
- 2-Stage design in order to improve the filtereffect
- Enclosure optimised for using in distribution-panels
- Suitable for the tropics - Epoxy resin casted
- Safety acc. to VDE, EN, UL, CSA

### Technical Data

Electrical data	
Rated voltage $U_R$	see table below
Frequency	see table below
Rated current $I_R$	see table below
Overload current	$1,5 \times I_R$ $t < 2 \text{ Min.}$ 3 x / h
Inductance $L_R$	see table below
Capacity $C_R$	see table below
Derivation current	$< 0,75 \text{ mA}$ at 230V~, 50Hz
Discharge resistor	ca. 1M
Operating data	
Duty circle	100%
Operating temperature range	-50°C to +85°C
Derating	-
Storage temperature range	-60°C...+105°C
Cooling	self cooling recommended respective distance 15mm each

Safety devices	
Fuse for input	-
Fuse for output	-
Overload protection	-
MTBF	$> 380.000 \text{ h}$

Safety data	
Test voltage	2,5kV- (Conductor - PE)
Protection class	Class 1 with PE-Connection (EN 60950)
Extra low safety potential	-
Ambient humidity	95% relative humidity, yearly average dewing allowed for use in tropical ambient
Protective class enclosure	IP 65
Protective class terminals	IP 20 (VGB4)
Vibration proof	$> 30g$ at 33Hz in X,Y and Z, acc. to IEC 60068-2-27

Applied construction regulations	
according to VDE	VDE 0100, 0110, 0113, 0551, 0160/W2, 0806
IEC	IEC 60939-1, IEC60939-2, IEC60068-2-3 IEC 60068-2-11-52, IEC 60529, IEC 380
EN	EN133200, EN60068-1 EN61000-6-1-2-3-4, EN50178 EN55011, EN50204, EN61558-2-17 EN60204, EN60529, EN61000-4-2-3-4-5-6-8-11 EN60068-1, EN60068-2-1-2-3-6-27-30 EN45501, EN50021
CSA / UL	CSA-C 22.2 / UL1283, UL94V1

Mechanics	
Mounting	On rails acc. to DIN 46277 or wallmounting with screws

<b>Type</b>	NFK772-4S22
<b>Rated voltage</b>	250VAC
<b>Frequency</b>	44 - 66Hz
<b>Rated current</b>	4,0Amp. at 40°C
<b>Inductance</b>	L1 2x5,8mH L2 2x400µH
<b>Capacity</b>	3 x 0,47µF (X2) 4 x 22nF (Y2)
<b>Dimensions (W x H x D)</b>	96x90x78
<b>Wheight</b>	approx. 1,00kg
<b>Order-No.</b>	51092

