


# Data sheet

## Switch mode power supply 19" : MPS10005

Terminal version MPS100

### Technical data

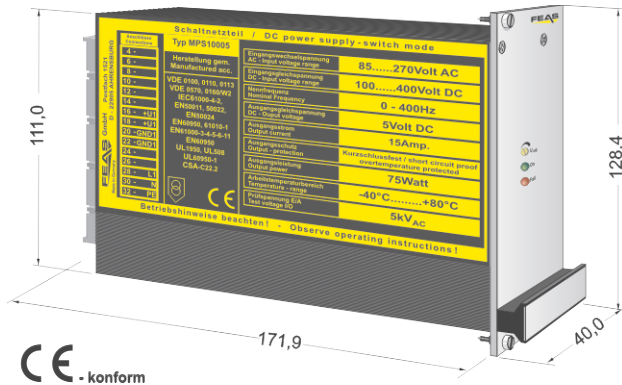

#### General data

Type	MPS10005
FEAS Order number	583105 / 1 / 2 / 3
Product description	Switch mode power supply
Product function	DC power supply

#### Input data

AC input voltage	85 - 270 V <sub>AC</sub> (0 - 400Hz)
DC input voltage	100 - 400 V <sub>DC</sub>
Input current at nominal load	at 115 V <sub>AC</sub> max. 1.8 A / at 230 V <sub>AC</sub> max. 0.9 A
Input current peak	< 8.0 A at 270 V <sub>AC</sub>
Protective circuit	Transient voltage suppressor Varistor

#### Output data

Output voltage U <sub>Nominal</sub>	5 V <sub>DC</sub>
Range of adjustment	3.2 ... 6.2 V <sub>DC</sub>
Output current I <sub>Nominal</sub>	15.0 A
Current limiting	1.5 x I <sub>Nominal</sub>
Fuse Mode (electronic fuse)	-
Power P <sub>Nominal</sub>	75 Watt
Residual ripple (20MHz Bandwidth)	<50mV <sub>pp</sub>

#### Control data

Control deviation (Load)	<200mV with load variation 10 ..... 90%
Control deviation (Supply)	<10mV with load variation ±10%
Control time	<10ms with load variation 10 ..... 90%

#### Operating data

Duty circle	100%
Efficiency	approx. 87%
Parallel connection	Yes
Operating temperature range	-40°C to +80°C
Storage temperature range	-40°C to +105°C
Derating	from 50°C
Cooling	selfcooling
Installation altitude	recommended respective distance 15mm each
MTBF	unlimited
	> 380.000h

#### Safety devices

Fuse for input	at 115 V <sub>AC</sub> 4.0 A / at 230 V <sub>AC</sub> 2.0 A slow blow
Fuse for output	not necessary - short circuit proof
Overload protection	integrated into device
Hold-up time	20 ms typ.

#### Safety data

Test voltage transformer	5kV <sub>AC</sub> according to VDE0570
High voltage resistance	Input/Output 4,4kV <sub>AC</sub> according to VDE0806/IEC380
Degree of EMI suppression	according to VDE0871B, EN55022/B
Protection class	Protection class I with PE-Connection (EN60950)
Extra low safety potential	PELV (EN60204), SELV (EN60950)
Ambient humidity	95% relative humidity, yearly average
	dewing allowed for use in tropical ambient
Protective class enclosure	IP65
Protective class terminals	IP20 (BGV A3)
Vibration proof	>30g at 33Hz in X, Y and Z
	acc. IEC68 and DIN1640

#### Status & Signal

Status indicator	LED - Operating, LED - Operating fail
Signals	-
Interface	-


#### Applied construction regulations

according to VDE	VDE0100, VDE0110, VDE0113, VDE0570, VDE0806
IEC	IEC60950-1, IEC61000-6-1,2,3,4, IEC60068-2-3, IEC60068-2-11-52, IEC60529
EN	EN60950-1, EN61140, EN61000-6-1, EN61000-6-2, EN61000-6-3, EN61000-6-4, EN55022, EN55011, EN61000-3-2, EN61000-3-3, EN60204, EN60529, EN61000-4-2,3,4,5,6,8,11, EN60068-1, EN6068-2, EN61558-2-17, EN61010-1
CSA/UL	CSA-C 22.2 / UL60950-1, UL508, UL1950


#### Mechanical data

Mounting	19"-Rack 3RU 8HP
Dimensions (W x H x D)	40mm x 111/128.4mm x 171.9/179.9/180.4mm
Weight	approx. 1.25kg

Terminal version MPS100-1

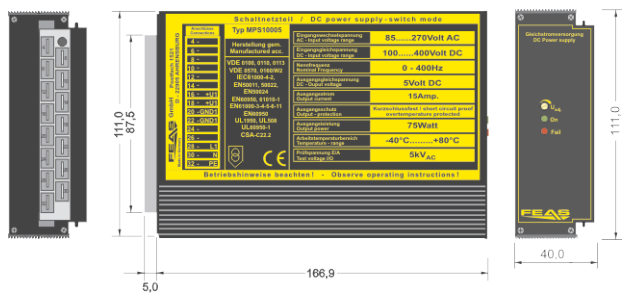


Terminal version MPS100-2

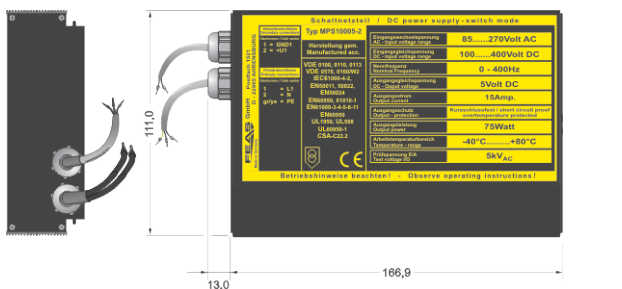

Normale Kabellänge = ca. 1,0m  
Normal cable length = approx. 1,0m

Terminal version MPS100-3

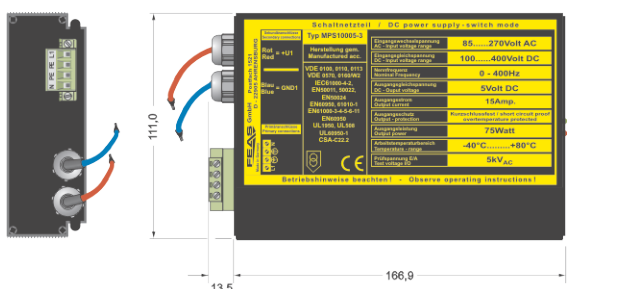

#### Products of the series:

Type	MPS10005	MPS10012	MPS10024	MPS10048
Order number	583105	583112	583114	583116
Output voltage	5V <sub>DC</sub>	12V <sub>DC</sub>	24V <sub>DC</sub>	48V <sub>DC</sub>
Output current	15,0A	10,0A	5,0A	2,5A



Postfach 1521  
D - 22905 Ahrensburg

Phone: +49 4102 42082  
Fax: +49 4102 40930

E-Mail: sales@feas.com  
Internet: www.feas.com