


# DC power supply unregulated for 3 x 500VAC input voltage type PS5U750-K

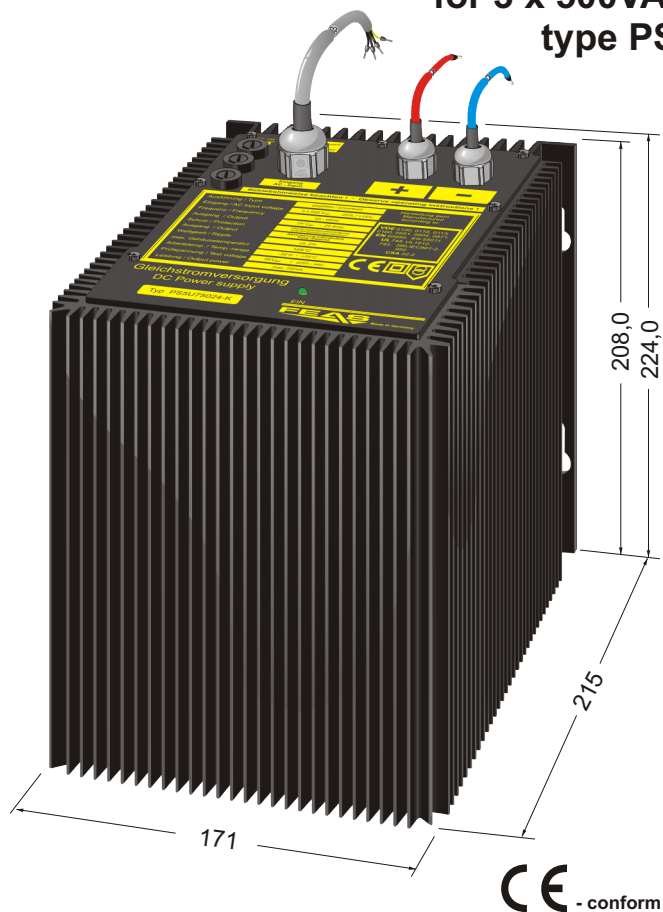

## Technical data

Input data		
Input voltage AC	3 x 500VAC	45 - 66 Hz
Input voltage tolerance	-20% to +15%	
Input current each phase at nominal load	at 3 x 500VAC max. 0,8A each phase	
Protective circuit	-	
Hold-up time	20 mSek. typ.	

Output data	
Output voltage $U_{Nominal}$	see table below
Output current $I_{Nominal}$	see table below
Current limiting	-
Residual ripple (100Hz)	< 2%

Control data	
Control deviation load	-
Control deviation supply	-
Control time	-

Operating data	
Duty circle	100%
Operating temperature range	-30°C to +70°C
Derating	-
Storage temperature range	-30°C...+105°C
Cooling	selfcooling
	recommended respective distance 15mm each

Safety devices	
Fuse for input	6,0A delayed each phase, integrated into the device
Fuse for output	in dependency of nominal output current
Overload protection	-
MTBF	>400.000 h

Safety data	
Test voltage transformer	5 kVac in accordance to VDE 0551
High voltage resistance	Primary circuit - secondary circuit 3,75 kVac acc. to VDE 0806 / IEC 380
Degree of EMI suppresion	< K acc. to VDE 0875 and VDE 0877
Protection class	Class 1 with PE-Connection (EN 60950)
Extra low safety potential	PELV (EN60204), SELV (EN 60950)
Ambient humidity	95% relative humidity, yearly average dewing allowed for use in tropical ambient
Protective class enclosure	IP 65
Protective class terminals	-
Vibration proof	>30g at 33Hz in X,Y and Z, acc. to IEC 60068-2-27

Applied construction regulations	
according to VDE	VDE 0100, 0110, 0113, 0551, 0160/W2, 0806
IEC	IEC 60950, IEC61000-6-1-2, IEC60068-2-3
	IEC 60068-2-11-52, IEC 60529, IEC 380
EN	EN60950, EN50082-1
	EN61000-6-1-2, EN50178,
	EN50204, EN61558-2-17
	EN60204, EN60529, EN61000-4-2-3-4-5-6-8-11
	EN60068-1, EN60068-2-1-2-3-6-27-30
	EN45501, EN50021
CSA / UL	CSA-C 22.2 / UL60950, UL508, UL1950

Mechanics	
Mounting	wall mounting with screws

- Output separated according to VDE 0551
- Extra low safety potential PELV (EN 60204), SELV (EN 60950)
- Parallel connection possible
- Suitable for the tropics - Epoxy resin casted
- Operating status shown by LED
- Safety acc. to VDE, EN, UL, CSA

Nominal output voltage		24,0V <sub>bc</sub>
Range of adjustment output voltage		-
Type		PS5U 75024-K
Nominal output current		25,0Amp.
Power		600Watt
Efficiency		90%
Dimensions (W x H x D)		171x224x215
Weight		approx. 16,56kg
Order-No.		584625

## Load current diagram

at nominal input voltage

