product specification

DC power supply unregulated: PS1U500L24 input: 230Vac - output: 24Vdc / 15.0Amp.



Smoothed output voltage
Output separated according to VDE0551
Extra low safety potential PELV (EN 50178) SELV (EN 60950)
Parallel connection possible
Operating status shown by LED
Simple wall mounting with screws
Vibration proof, suitable for the tropics - epoxy resin casted
Conforms to EMC and low voltage directive (€
Safety according to VDE, EN, UL, CSA

Application

The power supplies of the PS1U500L series are powerful and robust devices to power electrical loads, like contactors, magnetic switches, magnetic valves, relays or something like that. Power supplies of this type are suitable as well for the most PLC-applications.

By using only few components the uncomplex circuit arrangement guarantees the advantage of a long life span and a high degree of efficiency (>80%).


This power supply is optimally suited for loads requiring high starting current. Because of its robust design, casted in a rugged aluminium housing, it is particularly suitable for being used in rough industrial environment, e.g. in shipbuilding. Furthermore it is quite insensitive to surge voltages.


Functional principle

In the unregulated power supply PS1U500L AC voltage is transfered through a 50-Hz transformer. Afterwards the voltage is rectified by a bridge rectifier and the resulting pulsing DC voltage is smoothed with capacitors.

Because this type of power supply has no output voltage stabilization, the output voltage will also float accordingly to the transformation rate, depending on line-voltage fluctuations and consumer load.

Effect of smoothing by electrolytic capacitors






Design


Completly embedded with resin in an aluminium housing for wall mounting with screws.



Please read the data sheets and the user manual for further information

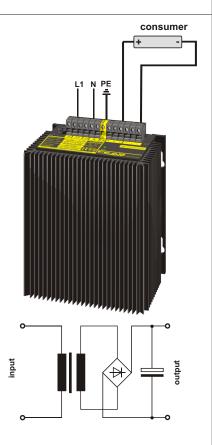

load diagram PS1U500L24





D - 22905 AHRENSBURG telefax: +49 4102 40930

phone: +49 4102 42082

e-mail: info@feas.com internet: www.feas.com

Volt DC